



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.5mm Plastisol Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.5mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	C-s2,d0		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.5mm S220GD+Z225, Topcoat TATA Colorcoat GP 200µm  
Plastisol, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** BS EN 13501-1:2018 Class C-s2, d0



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.5mm Plastisol Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.5mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	C-s2,d0		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:


**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over a white background.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025

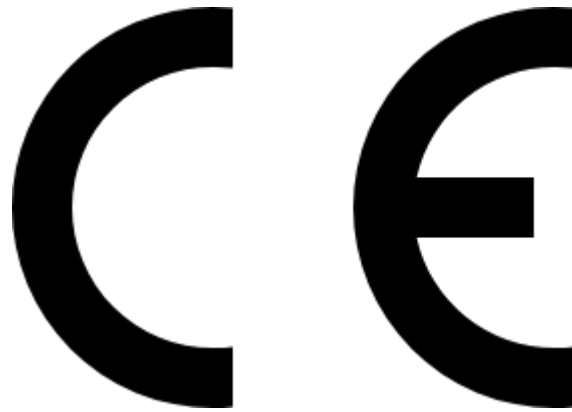

Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX

T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.5mm S220GD+ZA255, Topcoat TATA Colorcoat HPS200 Ultra  
200µm Plastisol, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** BS EN 13501-1:2018 Class C-s2, d0



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.5mm Plastisol Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.5mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	C-s2,d0		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.5mm S220GD+Z275, Topcoat TATA Colorcoat LG 200µm  
Plastisol, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** BS EN 13501-1:2018 Class C-s2, d0



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.5mm Polyurethane Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.5mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX

T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.5mm S220GD+ZA255, Topcoat TATA Colorcoat Prisma 40µm  
Polyurethane, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1





A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.5mm Polyurethane Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.5mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	12 x 10 <sup>-6</sup> K <sup>-1</sup>		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX

T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.5mm S220GD+ZA255, Topcoat TATA Colorcoat Prisma 65µm  
Polyurethane, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C32 - 1000**
- ii) Type: **0.5mm Polyester Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.5mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

**EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C32:** 0.5mm S220GD+Z225, Topcoat TATA PE 25µm Polyester,  
Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C32 - 1000**
- ii) Type: **0.5mm Polyester Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.5mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

**EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C32:** 0.5mm S220GD+Z275, Topcoat TATA PE 25µm Polyester,  
Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26-1000**
- ii) Type: **0.7mm Plastisol Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.7mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	C-s2,d0		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.7mm S220GD+Z225, Topcoat TATA Colorcoat GP 200µm  
Plastisol, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** BS EN 13501-1:2018 Class C-s2, d0





A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.7mm Plastisol Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.7mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	12 x 10 <sup>-6</sup> K <sup>-1</sup>		
<b>Reaction to Fire</b>	C-s2,d0		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.7mm S220GD+ZA255, Topcoat TATA Colorcoat HPS200 Ultra  
200µm Plastisol, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** BS EN 13501-1:2018 Class C-s2, d0



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.7mm Plastisol Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.7mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	C-s2,d0		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.7mm S220GD+Z275, Topcoat TATA Colorcoat LG 200µm  
Plastisol, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** BS EN 13501-1:2018 Class C-s2, d0



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.7mm Polyurethane Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.7mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	12 x 10 <sup>-6</sup> K <sup>-1</sup>		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX

T: +44 (0) 1495 814 000

## **EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.7mm S220GD+ZA255, Topcoat TATA Colorcoat Prisma 40µm  
Polyurethane, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.7mm Polyurethane Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.7mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	12 x 10 <sup>-6</sup> K <sup>-1</sup>		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

**EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.7mm S220GD+ZA255, Topcoat TATA Colorcoat Prisma 65µm  
Polyurethane, Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1





A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.7mm Polyester Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.7mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

**EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.7mm S220GD+Z225, Topcoat TATA PE 25µm Polyester,  
Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1



A CAPITAL COATED STEEL COMPANY

## DECLARATION OF PERFORMANCE

( The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 No. 1359 )

1. Name & Address of Manufacturer:

**Capital Coated Steel, North Blackvein Industrial Estate, Wattsville, Newport, NP11 7PX**

2. Description of Product:

- i) Identification: **CCS C26 - 1000**
- ii) Type: **0.7mm Polyester Coated Steel Sheet**
- iii) Use: **Self-supporting Steel Sheet to be used for Walling**

3. The Systems of Attestation of Conformity as set out in Annex ZA of EN14782:2006:

**Internal and external walls, ceilings and roofs subject to reaction to fire regulations: 4**

**External roofs subject to external fire performance regulations: 4**

4. Declared Performance to Table ZA.2 of EN 14782:2006:

Essential characteristics			Standard
<b>Mechanical Resistance</b>	<b>Intended Use</b>	Wall	EN 14782:2006
	<b>Type of Metal</b>	Steel	
	<b>Nominal Thickness</b>	0.7mm	
	<b>Steel Grade</b>	S220	
	<b>Dimension Tolerances</b>	As Factory Production Control	
		BS EN 508-1	
<b>Water Permeability</b>	Classed as water impermeable when unperforated		EN 14782:2006
<b>Vapour and Air Permeability</b>	Classed as vapour impermeable when unperforated		
<b>Dimension Change</b>	$12 \times 10^{-6} K^{-1}$		
<b>Reaction to Fire</b>	Class A1		BS EN 13501-1:2018

Signed on behalf of the Manufacturer:

**Name:** Jonathan Jenkins

**Signature:**

A handwritten signature in black ink, appearing to read "Jenkins", is written over the signature line.

**Position:** Manager, Quality Control, Capital Coated Steel

**Place and date of issue:** Newport, UK on 17/01/2025



Capital Coated Steel,  
North Blackvein Industrial Estate,  
Wattsville, Newport, NP11 7PX  
T: +44 (0) 1495 814 000

**EN 14782**

Self-supporting steel sheet to be used for external wall coverings

**C26:** 0.7mm S220GD+Z275, Topcoat TATA PE 25µm Polyester,  
Reverse coat nominal 10µm Polyester

**Reaction to Fire:** Class A1